



REAR STEP COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37 1/2" x 31" h	40" h x 40" w x 30 1/2" d	27 CU. FT.

Diagram illustrating the layout of the Firestorm 3000 chassis, showing various components and dimensions:

- MUD AND SNOW TIRES
- RUNNING BOARD HOSE TROUGHS
- CORD REEL
- 3" DECKGUN DISCHARGE
- COMMAND KL450 LIGHT TOWER
- 134"
- 45 DEGREE TAILBOARD
- GRIP STRUT INSERTS
- 300' of 2-1/2"
- 1,000' of 5"
- 300' of 2-1/2"
- 750 GALLONS WATER
- SMARTPOWER 10KW GENERATOR
- 20"
- EMS
- (4) HAND RAILS ON TOP OF BODY RAILS

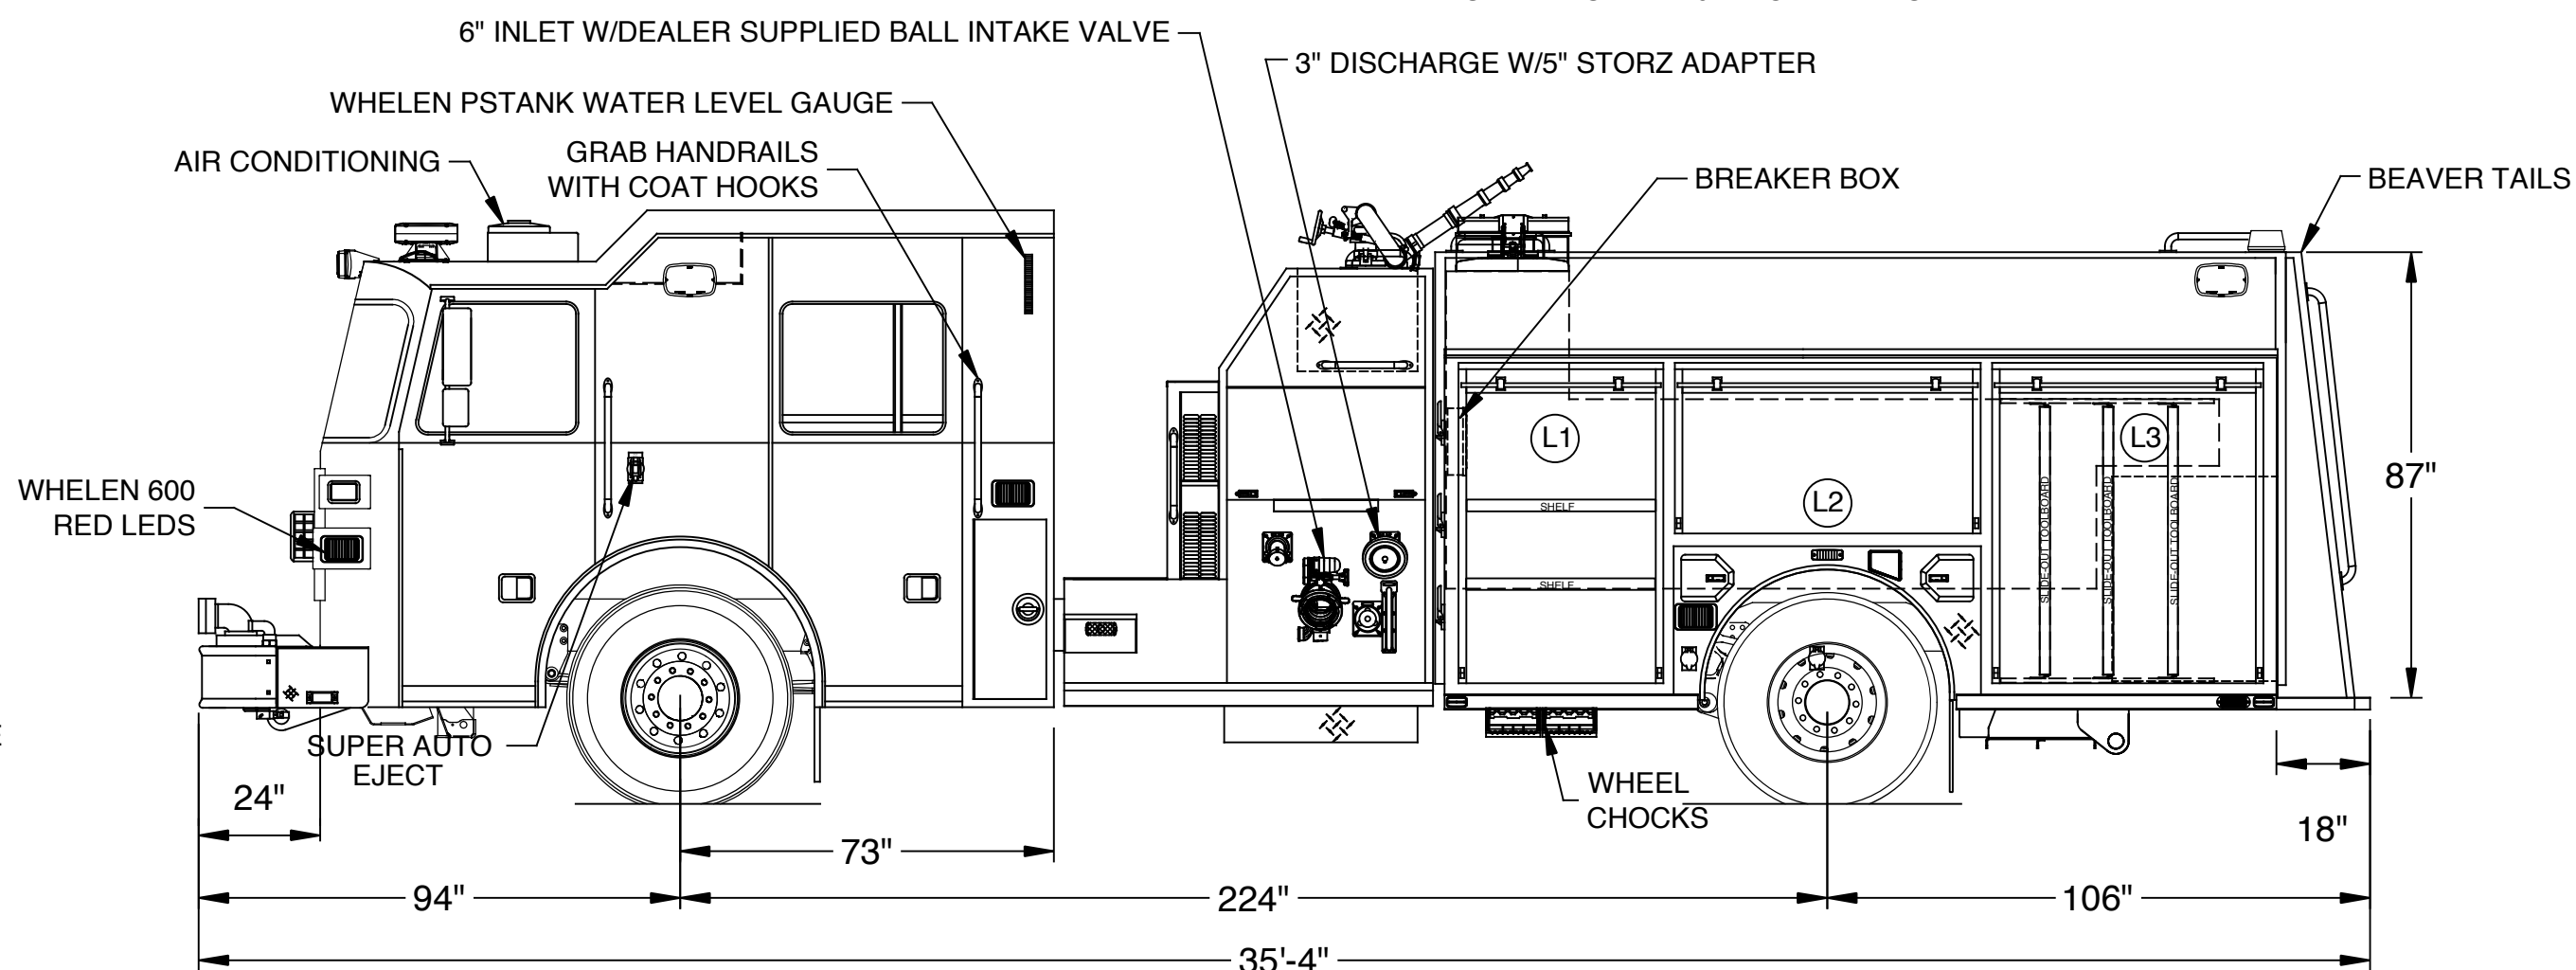

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.	CUSTOMER APPROVAL					DRAWN BY: R. MILLER	 MISHAWAKA FIRE DEPARTMENT MISHAWAKA, IN
	NAME: _____						
IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.	TITLE: _____	A	REV-A CHANGES ADDED	RM	11/11/15	MFG. FACILITY: DUBLIN	
DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.	DATE: _____	REV.	DESCRIPTION	BY	DATE		
THIS PRINT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF SUTPHEN CORPORATION.							
DWG. NO.: HS-5731							